

FTB-200 Compact Platform

THE INTELLIGENT PLATFORM BUILT FOR THE SUPERTECH



PART OF THE
EXFO | FTB Ecosystem



The FTB-200 delivers the best performance on the market for optical, Ethernet and multiservice testing.

KEY FEATURES

Connects anywhere: USB, 3G, Wi-Fi, VPN and Bluetooth

Loaded with utilities: all the tools required to maximize field testing, plus third-party applications

Like a PC: Intel processor with Windows Embedded Standard operating system

EXFO Connect-compatible: automated asset management; data goes through the cloud and into a dynamic database

GPS capabilities: accurate coordinates under the same conditions as a regular satellite GPS receiver

SPEC SHEET

THE POWER YOU NEED, NO MATTER THE APPLICATION

The FTB-200 delivers the processing power of a high-end platform for a variety of advanced applications—all in a conveniently sized go-anywhere field-testing tool.

CWDM

CWDM Turn-Up Testing

Integrate two metro/CWDM OTDRs to test through CWDM-based mux/demux at ITU-recommended wavelengths.

ROADM and PTN

40G and ROADM Commissioning

House an OSA into a compact portable solution for fast and accurate DWDM commissioning and high-speed networking—up to 40 Gbit/s.

Multiservice

Multiservice Testing

Simultaneously run a 10 gigabit next-generation SONET/SDH analyzer, as well as 1 gigabit and 10 gigabit Ethernet analyzers, delivering IPTV test capabilities and TCP throughput assessment.

Fiber

Fiber Characterization and Construction

Combine PMD, CD and OTDR testing in a single solution, and incorporate an OTDR with a multitest module, for in-depth link characterization.

Service Activation

Business Service Activation

Join an FTTx PON/MDU OTDR featuring a dynamic range of up to 39 dB with a 1/10 gigabit Ethernet testing module, to simplify and speed up the deployment of Ethernet services.

Carrier Ethernet

Carrier Ethernet Testing from 10 Mbit/s to 10 Gbit/s

Benefit from a comprehensive suite of Ethernet testing capabilities, including EtherSAM (ITU-T Y.1564), for turning up and troubleshooting mobile backhaul, commercial and wholesale services.



ONE PLATFORM, OVER 30 MODULES

Optimized for all phases of the network lifecycle, the FTB-200 houses any of EXFO's FTB one- or two-slot modules to meet your evolving needs. Configure your platform by combining optical, transport and datacom modules to cover a wide range of applications. Offering power, speed and modularity in a compact format, the FTB-200 is the perfect tool for the field.

Optical Test Modules

Discover the industry's most renowned line of OTDRs, the most advanced dispersion analyzers and optical spectrum analyzers.

OPTICAL TEST MODULES	
OTDR	FTB-7xxx (D-E Series)
MultiTest Module	FTB-3930
Optical Spectrum Analyzers	FTB-5240S FTB-5240S-P
Single-Ended Dispersion Analyzer	FTB-5700

Transport and Datacom Test Modules


Choose from the most compact and powerful SONET/SDH, OTN, Fibre Channel and Ethernet analyzers—the new standards in next-generation network testing.

TRANSPORT AND DATACOM TEST MODULES	
DSn/PDH and SONET/SDH Electrical Test Module	FTB-8105 Transport Blazer
SONET/SDH Test Module	FTB-8115 Transport Blazer
Next-Generation SONET/SDH Test Modules	FTB-8120/8130 Transport Blazer
Multiservice Test Modules	FTB-8120NGE/8130NGE Power Blazer
Ethernet Test Modules	FTB-8510B Packet Blazer
10 Gigabit Ethernet Test Module	FTB-8510G Packet Blazer
Fibre Channel and Ethernet Test Modules	FTB-8525/8535 Packet Blazer



DELIVERING UNIQUE PERFORMANCE

Providing the same compatibility as its predecessor, the FTB-200 platform now leverages a powerful Intel ATOM processor to deliver unmatched speed and performance for the most demanding test applications.

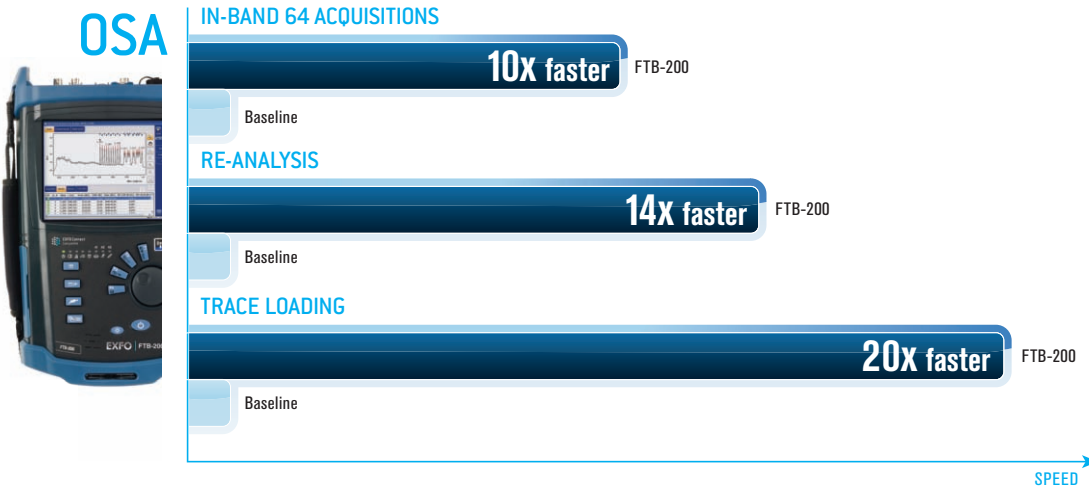

SOFTWARE TEST TOOLS

EXpert TEST TOOLS

EXpert VoIP TEST TOOLS

EXpert VoIP generates a voice-over-IP call directly from the test platform to validate performance during service turn-up and troubleshooting.

- › Supports a wide range of signaling protocols, including SIP, SCCP, H.248/Megaco and H.323
- › Supports MOS and R-factor quality metrics
- › Simplifies testing with configurable pass/fail thresholds and RTP metrics

EXpert IP TEST TOOLS

EXpert IP integrates six commonly used datacom test tools into one platform-based application to ensure that field technicians are prepared for a wide range of testing needs.

- › Rapidly performs debugging sequences with VLAN scan and LAN discovery
- › Validates end-to-end ping and traceroute
- › Verifies FTP performance and HTTP availability

EXpert IPTV TEST TOOLS

This powerful IPTV quality assessment solution enables set-top-box emulation and passive monitoring of IPTV streams, allowing quick and easy pass/fail verification of IPTV installations.

- › Real-time video preview
- › Analyzes up to 10 video streams
- › Comprehensive QoS and QoE metrics including MOS score

SOFTWARE APPLICATIONS

ConnectorMax

Providing lightning-fast results in the first step of fiber-link testing, ConnectorMax is the industry's first platform-based, automated inspection application; it delivers quick pass/fail assessment of connector endfaces and is specifically designed to save both time and money in the field.

THIRD-PARTY TEST TOOLS

Wireshark

This live-network packet-capture utility makes it possible to look "inside" the packets and obtain data such as transmission time, source, destination, protocol type, etc. Users can then diagnose a problem or root out suspicious behavior. Wireshark is a standard utility on all FTB-200 platforms.

JPerf

This TCP performance testing tool can create TCP and UDP data streams, which measure the throughput of a network that is carrying them. Thanks to various user-definable parameters, technicians can rely on JPerf to optimize or tune a network under test.

Network Stumbler

Network Stumbler verifies wireless network configurations, enabling field technicians to identify areas that have poor coverage or wireless interference, and helping them to aim antennas for full effect and find unauthorized access points.

SOFTWARE UTILITIES

Update Manager

Ensure that your entire fleet of platforms is up-to-date with the latest software, and easily manage your maintenance contracts.

VNC configuration

The Virtual Network Computing utility allows technicians to easily communicate settings to remote colleagues.

Microsoft Internet Explorer

Access the Web directly from your platform interface.

Bluetooth file-sharing


Share files from your FTB-200 to any Bluetooth-enabled device.

Wi-Fi connection

Display available Wi-Fi connections and save your default settings.

CONNECTED ANYWHERE, ANYTIME

The value of connectivity resides in the ability to connect your platform anywhere, at any time. That's why we have equipped our platforms with the technology to be as flexible as possible. Whether to transfer data to the cloud, to a device or to acquire a platform's location via GPS, you have what it takes.

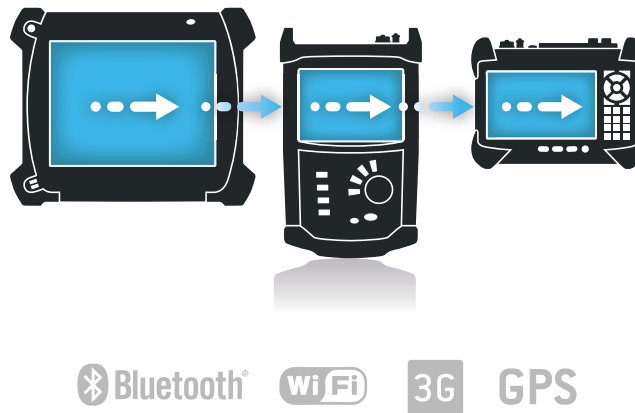

Secure VPN communications

We have brought VPN capabilities to our platforms to provide a secured connection for those who need it. And, we cover 99% of the world's VPN connection types, thanks to Cisco, Juniper and Checkpoints* technologies. Secure communications are now within your reach.^{a,b}



3G mobility

Our 3G universal USB angle is ready to house most service provider SIM cards. In fact, it is compatible with over 80% of the worldwide 3G coverage offered by all the main 3G service providers using unlocked SIM cards.^{b,c}



Remote control

Use remote assistance to troubleshoot units in the field, trigger tests remotely or help a technician with a problem. Working without it is hard to imagine.



Instant messaging

Since our platforms are Windows-based, they are just like a PC. You can install chat tools to quickly communicate with your team.

Notes

- a. Please refer to the User Guide to learn how to set up your VPN connection, as required by your IT department.
- b. Current FTB platform must be updated to the latest version supporting these options.
- c. Please refer to the User Guide when installing this device on your compatible FTB platform.


EXFO | Connect

EXFO CONNECT MAKES YOUR DATA MEAN BUSINESS

EXFO Connect lets you store and push equipment and test data automatically to our cloud-based servers, allowing you to streamline test operations, from build-out to maintenance.

Centralize and automate inventory management to provide global visibility

Test Equipment Manager, a component of EXFO Connect, deals with the constant demands of software updates, keeping track of the equipment and ensuring that field technicians involved in network construction, maintenance or troubleshooting are properly equipped. The best part? It's all automated.

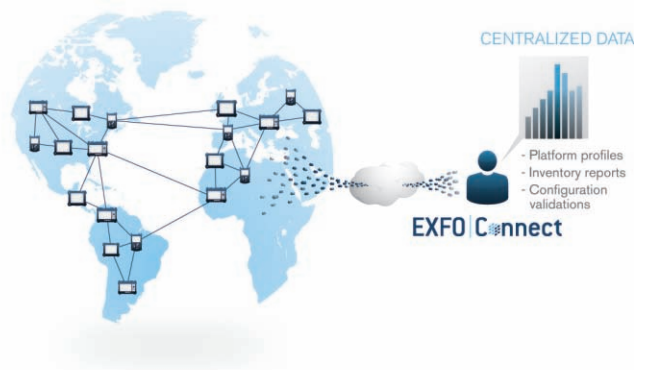


Store and consolidate test data across the entire company

Test Data Manager, another component of EXFO Connect, allows managers to make the most of their test investment. It extracts the full value out of the generated test data to help you optimize network efficiency, all through a highly automated, secure and centralized environment.

Create and customize reports from collected data

EXFO Connect tracks and updates your test gear, giving you fingertip access to all the data and allowing for quick correlation and tailored reporting for any member of the organization.

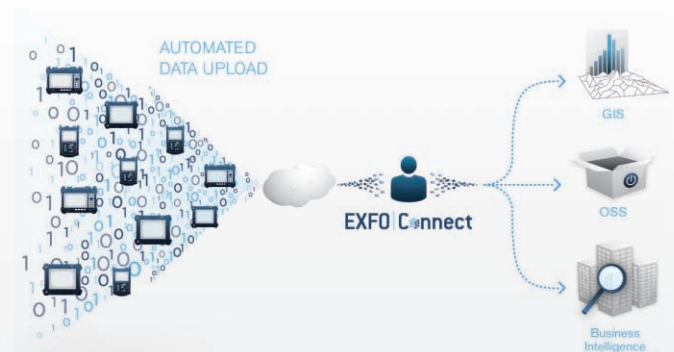

SPECIFICATIONS^a

Display	Touchscreen, color, 640 x 480 TFT 163 mm (6.5 in)
Interfaces	Two USB 2.0 ports RJ-45 LAN 10/100/1000 Mbit/s Fiber inspection probe connector port (video) Built-in Bluetooth and Wi-Fi (hardware option)
Storage	8 GB internal memory (flash)
Battery	Rechargeable lithium-ion batteries 8 hours of operation as per Telcordia (Bellcore) GR-196
Power supply	AC/DC adapter, input 100-240 VAC, 50-60 Hz, 1.6 A max, output: 24 VDC, 90 W
Computer	Intel ATOM processor Windows Embedded Standard

GENERAL SPECIFICATIONS

Temperature	
Operating	0 °C to 50 °C (32 °F to 122 °F)
Storage ^b	-40 °C to 60 °C (-40 °F to 140 °F)
Relative humidity	0 % to 95 % non-condensing
Size (H x W x D)	322 mm x 197 mm x 109 mm (12 11/16 in x 7 3/4 in x 4 5/16 in)
Weight ^b	2.1 kg (4.6 lb)
Vibration	<1.5 g at 10 Hz to 500 Hz (on three main axes)
Mechanical shock	<760 mm on six sides and eight main edges (compliant to GR-196-CORE)

ACCESSORIES

FP4S	400x Fiber Inspection Probe	GP-2028	Computer security cable kit
FP4D	200x/400x Fiber Inspection Probe	GP-2112	3G Universal USB Dongle
GP-10-070	Rigid FTB-200 carrying case	GP-2113	GPS USB Dongle
GP-10-072	Semi-rigid FTB-200 carrying case	GP-2116	Single-slot storage module
GP-302	USB mouse	GP-2137	USB-to-RS-232 converter
GP-1002	Headset	GP-2138	DC car adapter/inverter
GP-1008	VFL adapter (2.5 mm to 1.25 mm)	GP-2144	USB 16G micro-drive
GP-2001	USB keyboard	GP-2155	Carry-on size backpack ^c
GP-2016	10 feet RJ-45 LAN cable		

PM-200 BUILT-IN POWER METER SPECIFICATIONS^d

Calibrated wavelengths (nm)	850, 1300, 1310, 1490, 1550, 1625, 1650
Optional CWDM calibrated wavelengths (nm)	1270, 1290, 1310, 1330, 1350, 1370, 1390, 1410, 1430, 1450, 1470, 1490, 1510, 1530, 1550, 1570, 1590, 1610, 1383, 1625
Power range (dBm)	10 to -86 (InGaAs) 26 to -64 (GeX)
Uncertainty (%) ^e	±5 % ± 3 pW (InGaAs) ±5 % ± 0.4 nW (GeX)
Display resolution (dB)	
InGaAs	0.01 = max to -76 dBm 0.1 = -76 dBm to -86 dBm 1 = -86 dBm to min
GeX	0.01 = max to -54 dBm 0.1 = -54 dBm to -64 dBm 1 = -64 dBm to min
Automatic offset nulling range ^f	Max power to -63 dBm for InGaAs Max power to -40 dBm for GeX
Tone detection (Hz)	270/1000/2000

VISUAL FAULT LOCATOR (VFL) (OPTIONAL)

Laser, 650 nm ±10 nm
CW
Typical P _{out} in 62.5/125 μm: 3 dBm (2 mW)

Notes

- All specifications valid at 23 °C (73 °F).
- Not including internal batteries. Battery maximum storage temperature: 60 °C (140 °F).
- The selected model may change without notice.
- At 23 °C ± 1 °C, 1550 nm and FC connector. With modules in idle mode. Battery operated.
- Up to 5 dBm.
- For ±0.05 dB, from 18 °C to 28 °C.

LASER SAFETY



21 CFR 1040.10 AND IEC 60825-1:2007
CLASS 3R WITH VFL OPTION

ORDERING INFORMATION

FTB-200-V2-XX-XX-XX-XX-XX

Model

FTB-200-v2 = Compact modular platform

Display

S1 = TFT active screen

S2 = Outdoor-enhanced screen

Wi-Fi/Bluetooth hardware option

00 = Without RF components

RF = With RF capability (Wi-Fi and Bluetooth)

Power meter

00 = Without power meter

VPM2X = VFL platform; PM; GeX detector

VPM3 = VFL; PM; InGaAs detector

VPM2X-CWDM = VFL platform; PM; GeX detector;
CWDM wavelengths calibrated
(from 1270 nm to 1610 nm)VPM3-CWDM = VFL; PM; InGaAs detector;
CWDM wavelengths calibrated
(from 1270 to 1610 nm)**Software option**

00 = Without any software option

IPT = Ping and traceroute functionalities

FPSA = ConnectorMax analysis software

FPSAMF = ConnectorMax kit: single-fiber analysis and reporting; multiple-fiber
connector assessment wizard and reportingExpert-VolP = RTP-based call testing software application, including packet loss
analysis, jitter measurement and complete voice quality metricsExpert-IP = IP/Ethernet test suite, with tests including FTP performance, HTTP
availability, VLAN scan, LAN discovery, ping, traceroute, IP/Ethernet
port statistics (license for a single platform)

EXpert-IPTV = IPTV test suite

EXpert-TPP = Triple-play bundle for voice, video and data testing; includes
EXpert IP Test Tools, EXpert IPTV Test Tools, EXpert VoIP Test
Tools and EXpert SIPEXpert-SIP = SIP call signaling support ^aEXpert-SCCP = SCCP call signaling support ^aEXpert-H.323 = H.323 call signaling support ^aEXpert-H.248 = H.248/Megaco call signaling support ^a**Probe**

00 = Without probe

FP4S = Inspection probe (400x)

FP4D = Inspection probe (200x/400x)

Connector adapter ^b

FOA-12 = Biconic

FOA-14 = NEC D4: PC, SPC, UPC

FOA-16 = SMA/905, SMA-906

FOA-22 = FC/PC, FC/SPC, FC/UPC, FC/APC

FOA-28 = DIN 47256, DIN 47256/APC

FOA-32 = ST: ST/PC, ST/SPC, ST/UPC

FOA-54 = SC: SC/PC, SC/SPC, SC/UPC, SC/APC)

FOA-78 = Radial EC

FOA-96B = E-2000 E-2000/APC

FOA-98 = LC

FOA-99 = MU

WC2 = FOA-FC-ST-SC-LC

Example: FTB-200-v2-S1-RF-VPM2X-FOA-16-FP4S-IPT-FPSA

Notes

a. If EXpert VoIP is selected.

b. If power meter is selected.

EXFO Corporate Headquarters > 400 Godin Avenue, Quebec City (Quebec) G1M 2K2 CANADA | Tel.: +1 418 683-0211 | Fax: +1 418 683-2170 | info@EXFO.com

Toll-free: +1 800 663-3936 (USA and Canada) | www.EXFO.com

EXFO America	3400 Waterview Parkway, Suite 100	Richardson, TX 75080 USA	Tel.: +1 972 761-9271	Fax: +1 972 761-9067
EXFO Asia	100 Beach Road, #22-01/03 Shaw Tower	SINGAPORE 189702	Tel.: +65 6333 8241	Fax: +65 6333 8242
EXFO China	36 North, 3 rd Ring Road East, Dongcheng District Room 1207, Tower C, Global Trade Center	Beijing 100013 P.R. CHINA	Tel.: + 86 10 5825 7755	Fax: +86 10 5825 7722
EXFO Europe	Omega Enterprise Park, Electron Way	Chandlers Ford, Hampshire S053 4SE ENGLAND	Tel.: +44 23 8024 6810	Fax: +44 23 8024 6801
EXFO Finland	Elektronikkatie 2	FI-90590 Oulu, FINLAND	Tel.: +358 (0)403 010 300	Fax: +358 (0)8 564 5203
EXFO Service Assurance	270 Billerica Road	Chelmsford, MA 01824 USA	Tel.: +1 978 367-5600	Fax: +1 978 367-5700

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at www.EXFO.com/specs.

In case of discrepancy, the Web version takes precedence over any printed literature.